



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B05D 7/00, A01C 1/06, A61K 7/06, D06M 15/00, 23/00, C08F 2/18	A1	(11) International Publication Number: WO 98/25710 (43) International Publication Date: 18 June 1998 (18.06.98)
(21) International Application Number: PCT/US97/22772 (22) International Filing Date: 12 December 1997 (12.12.97) (30) Priority Data: 08/766,865 12 December 1996 (12.12.96) US 08/769,639 12 December 1996 (12.12.96) US 08/929,750 15 September 1997 (15.09.97) US (71) Applicant: LANDEC CORPORATION [US/US]; 3603 Haven Avenue, Menlo Park, CA 94025 (US). (72) Inventors: STEWART, Ray, F.; 634 Handley Trail, Redwood City, CA 94062 (US). BALACHANDER, Natarajan; 1239 Vicente Drive #68, Sunnyvale, CA 94086 (US). YOON, Valentine, Y.; 945 Ward Drive #138, Santa Barbara, CA 93111 (US). BITLER, Steven, P.; 444 University Drive, Menlo Park, CA 94025 (US). PHAN, Loc; 1197 Fargate Circle, San Jose, CA 95131 (US). (74) Agents: SHELDON, Jeffrey, G. et al.; Sheldon & Mak, 9th floor, 225 South Lake Avenue, Pasadena, CA 91101 (US).	(81) Designated States: AU, CA, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: AQUEOUS DISPERSIONS OF CRYSTALLINE POLYMERS AND USES (57) Abstract Aqueous dispersions of crystalline polymers based on hydrophobic monomers, preferably on a mixture of hydrophobic and hydrophilic monomers which contains a crosslinking monomer, particularly side chain crystalline (SCC) polymers. The dispersions are useful for providing coatings on substrates, particularly on seeds (whose dormancy is thus extended) and on fibrous substrates, particularly human hair (which thus becomes heat-settable).		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5 This invention relates to aqueous dispersions of crystalline polymers, methods for making such dispersions and the use of such dispersions for coating substrates.

10 It is known to use certain organic polymers to provide coatings on a wide variety of substrates, including hair (see U.S. Pat. Nos. 4,196,190; 4,452,216; 4,834,968 and 4,983,383); fabrics (see U.S. Patent Nos. 3,644,241; 3,833,393 and 4,780,499); and seeds and other organisms (see U.S. Patent No. 5,129,180). It is also known to set a fabric by impregnating the fabric with a monomer component, and polymerizing the monomer while maintaining the fabric in a desired configuration (see U.S. Patent No. 4,401,688).

15 One class of polymers which has been used for coating substrates comprises side-chain crystalline ("SCC") polymers. However, the known coating compositions containing SCC polymers have the disadvantage that the polymer is dissolved in an organic solvent. Organic solvents are expensive, require environmental controls, and are particularly undesirable for application to human hair or to an organism.

20 Attempts have been made to prepare aqueous dispersions of SCC polymers (see *British Polymer Journal* 20, 521-524 (1988), U.S. Patent Nos. 5,506,307 and 5,516,865, and Japanese Patent Document No. 6-192341), but the results have been poor and/or the techniques expensive.

25 We have discovered, in accordance with the present invention, that very valuable results can be achieved by coating substrates with aqueous dispersions of polymeric particles in which the polymer is a crystalline polymer containing units derived from at least one hydrophobic monomer and preferably also from a lesser amount of units derived from at least one hydrophilic monomer. Particularly useful results are obtained when the substrate is a seed or other organism, or a fibrous material. We have also
30 discovered, in accordance with the invention, novel aqueous dispersions of crystalline polymers and methods of making such dispersions.

In one of its embodiments, this invention provides a substrate having a solid polymeric coating thereon, the coating having been obtained by:

- 35 (1) applying to the substrate an aqueous dispersion of solid particles comprising a crystalline polymer, the polymer (a) having a melting point T_m and (b) comprising units derived from a hydrophobic monomer, and

(2) evaporating water from the dispersion to form the solid polymeric coating;

the coating having at least one of the following characteristics:

(A) at temperatures below T_m , the coating is substantially impermeable to water (as hereinafter defined), and at temperatures above T_m , the coating is substantially permeable to water (as hereinafter defined);

(B) the polymer is a crosslinked polymer having a gel content of at least 50%,

(C) the polymer is derived from a monomer component comprising:

(i) a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and

(ii) a hydrophilic monomer component comprising a hydrophilic monomer, the ratio by weight of the hydrophobic monomer component to the hydrophilic monomer component being 10:1 to 50:1;

(D) the polymer is derived from a monomer component comprising a hydrophobic monomer component comprising (i) a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and (ii) a second hydrophobic monomer which

(a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is less than T_c , and

(b) is present in amount such that T_m is $(T_c - 5)^\circ\text{C}$ or less;

(E) the polymer is derived from a monomer component comprising a hydrophobic monomer component comprising (i) a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and (ii) a second hydrophobic monomer which

(a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is more than T_c , and

(b) is present in amount such that the coating has a tack at $(T_c + 10)^\circ\text{C}$ which is less than the tack at $(T_c + 10)^\circ\text{C}$ of a coating formed under the same conditions from a composition which is identical except that the crystalline polymer does not contain units derived from the second hydrophobic monomer;

(F) the polymer is derived from a monomer component comprising:

(i) a hydrophobic monomer component comprising a hydrophobic monomer, the hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c ;

(ii) a hydrophilic monomer component comprising a hydrophilic monomer; and

(iii) a crosslinking monomer having at least two polymerizable groups;

(G) the polymer is derived from a monomer component comprising one or more monomers containing carboxyl groups, at least 75% of the carboxyl groups having been neutralized;

(H) the polymer is crosslinked by an external crosslinker (as hereinafter defined);

(I) the particles of the dispersion have coalesced to form a continuous coating, but retain a particulate character;

(J) the coating contains less than 1% of unreacted monomer, based on the weight of the polymer; and

(K) at least some of the particles comprise a core comprising said crystalline polymer and a coating around the core comprising a substantially amorphous polymer.

In describing the invention below, unless otherwise noted, parts, percentages and ratios are by weight. The monomers from which the crystalline polymer is derived are important. The term hydrophobic monomer is used herein to denote a monomer whose solubility in water at 25°C is less than 2%. The term hydrophilic monomer is used herein to denote a monomer whose solubility in water at 25° is 2% or less. More than one hydrophobic monomer can be used, and the term hydrophobic monomer component is used herein to denote all the hydrophobic monomers collectively, and is often abbreviated herein to "BMC." More than one hydrophilic monomer component can be used, and the term hydrophilic monomer component is used herein to denote all the hydrophilic monomers collectively, and is often abbreviated herein to "PMC." The monomers from which the crystalline polymer is derived can include one or more monomers which contain two or more polymerizable groups, so that the polymer is crosslinked. Such monomers (which may be hydrophobic or hydrophilic) are referred to herein as crosslinking monomers; and the term crosslinking monomer component is used herein to denote all the crosslinking monomers collectively, and is often abbreviated herein to "XLC." Except where otherwise noted, percentages of monomers given herein (both as

starting materials, and as residual monomers) are based on the total weight of the monomer starting material. As further discussed below, the monomers used in preparing the crystalline polymers are preferably n-alkyl acrylates or methacrylates. The abbreviation CnA and 'CnMA are used to denote n-alkyl acrylates and n-alkyl methacrylates, respectively, in which the n-alkyl group contains x carbon atoms. For example C4A denotes butyl acrylate, and C12MA denotes lauryl methacrylate.

Crystalline melting points given herein (T_m and T_c) are the peak of a curve produced using a differential scanning calorimeter (DSC) at a heating rate of 10°C per minute, and using the second heat cycle. The onset of melting (T_o) is taken from the same curve. Tack values given herein are measured as follows. The latex is applied to a polymeric film (a polyester film available from DuPont under the trade name "Mylar," or a filled polyolefin film available from PPG under the trade name "Teslin"), at a rate such that after the coating has been dried at 65°C for 2 hours, it has a thickness of about 30 microns. Two such films are laminated together at 35°C and the tack is measured with a vslip/peel tester at 230 cm/min.

In a first preferred aspect, this invention provides a method of treating an organism to extend its dormancy, the method comprising (1) applying to the organism a non-phytotoxic coating composition which comprises (a) water, and (b) suspended in the water, particles which comprise a crystalline polymer having a melting point T_m of 0° to 40°C; and (2) causing water to evaporate from the composition, thereby forming on the organism a coating which (a) at temperatures below T_m is substantially impermeable to water and (b) at temperatures above T_m is substantially permeable to water.

In a second preferred aspect, this invention provides a composition which comprises:

(a) water,
(b) suspended in the water, particles comprising a crosslinked crystalline polymer which

- (i) has a gel content of at least 50%,
- (ii) contains less than 1% of unreacted monomer, and
- (iii) is derived from a monomer component comprising:
 - 1) a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and
 - 2) a hydrophilic monomer component comprising a hydrophilic monomer, and

3) a crosslinking monomer having at least two
polymerizable groups; and

(c) a surfactant.

In a third preferred aspect, this invention provides a method of making a
composition in accordance with the second preferred aspect, the method comprising:

(a) providing an aqueous reaction medium comprising:

(i) water,

(ii) the monomer component, the monomer component containing
at least 2% of the hydrophilic monomer component,

(iii) the surfactant, and

(iv) at least 1% based on the water, of a cosolvent which
increases the solubility of the hydrophobic monomer component in the water;

(b) polymerizing the monomer component in the aqueous reaction
medium so that at least 99% thereof polymerizes to form the crystalline polymer in the
form of particles having an average particle size less than 0.5 microns, the monomer
component being present in amount such that at the end of the polymerization, the solid
polymer content of the reaction mixture is at least 30%; and

(i) the surfactant being present in amount such that the monomer
component is initially present in the aqueous reaction medium in the form of droplets
having a diameter greater than 10 microns, and/or

(ii) the surfactant and the cosolvent being present in amount such
that the hydrophilic monomer component is substantially randomly polymerized in the
crystalline copolymer.

In a fourth preferred aspect, this invention provides a method for preparing
an aqueous suspension, the method comprising the steps of:

(a) providing an aqueous reaction medium comprising:

(i) water,

(ii) a first monomer component comprising a hydrophobic
monomer component comprising a first hydrophobic monomer, the first hydrophobic
monomer being such that a homopolymer thereof is crystalline, and

(iii) a surfactant;

b) polymerizing the first monomer component to form a crystalline
polymer in the form of particles suspended in the reaction mixture; and

c) polymerizing a second monomer component to form a shell on said
particles,

the amounts of said first and second monomer components being such that the product of step (c) has a solids content of at least 30%, and

the amount of surfactant being such that the product of step (c) contains particles having an average particle size of less than 0.5 microns and a residual monomer content of less than 1%.

In a fifth preferred aspect, this invention provides a composition suitable for use in setting a fibrous material, the composition comprising:

(a) water;

(b) particles suspended in the water, the particles comprising a crystalline polymer; and

(c) an effective amount of an additive having a desired effect on the fibrous material. The term "effective amount" is used herein to denote an amount which is sufficient to provide the fibrous material with desired benefits, taking into consideration the thickness, density, length and texture of the fibers.

In a sixth preferred aspect, this invention provides a method of coating a fibrous material, the method comprising:

(1) applying to the fibrous material a composition in accordance with the fifth aspect of the invention; and

(2) evaporating the water from the composition while the composition is in contact with the fibrous material, thereby forming a coating on the fibrous material. This method can further comprise:

(3) while the coating is at a temperature above T_m , setting the fibrous material into a first desired configuration; and

(4) cooling the coating to below T_m while maintaining the fibrous material in the first desired configuration.

If desired, the method can further comprise:

(5) reheating the coating to a temperature greater than T_m ;

(6) after reheating the coating, and while the coating is at a temperature above T_m , setting the fibrous material into a second desired configuration which is the same as or different from the first desired configuration; and

(7) cooling the coating while maintaining the fibrous material in the second desired configuration.

The term "cooling the coating" includes merely leaving the coated material to cool in the ambient atmosphere, as well as methods in which active steps are taken to effect cooling. Fibrous materials which can be used include hair, particularly human hair,

and woven, knitted and non-woven fabrics and other textile products such as grains, including cotton and cotton/polyester blend materials.

It is to be understood that in the foregoing description of the invention, and in the more detailed description set forth below, the various features which are disclosed may be used in any appropriate combination, and features which are disclosed in connection with a particular embodiment can be used singly or in combination in connection with the invention in general and in connection with other embodiments, except of course where the features are mutually exclusive.

A. Materials for Use In The Preparation of the Polymeric Dispersions

In order to prepare the aqueous polymeric dispersions which form part of the present invention, and/or which can be used to coat substrates in accordance with the invention, a monomer component is dispersed in water with the aid of a surfactant and preferably a cosolvent; optionally other additives may also be present. The reaction mixture is then subjected to conditions which cause the monomer(s) to react to form a polymer which remains in suspension in the reaction medium. The monomer component comprises a hydrophobic monomer component (BMC) and preferably also a hydrophilic monomer component (LMC). Either the BMC or the LMC, or both, can include a crosslinking monomer. The reaction mixture can also contain a crosslinking agent, which can be (a) a crosslinking monomer component (XLC) which comprises at least one monomer containing at least two polymerizable groups, or (b) an "external crosslinker." An external crosslinker is a compound which increases the apparent molecular weight of the polymer without becoming a covalently bound part of the polymer, and which increases the mechanical strength of coatings formed from the aqueous dispersion of the polymer.

1. Monomer Components

(a) Hydrophobic Monomer Component (BMC)

The BMC comprises at least one first hydrophobic monomer such that a homopolymer thereof is crystalline and has a melting point T_c . It may also be desirable for the BMC to include at least one second hydrophobic monomer such that a homopolymer thereof is amorphous and has a glass transition point T_g . In one embodiment, T_g is less than T_c and the second hydrophobic monomer is present in amount such that the T_m of the polymer is $(T_c - 5)^\circ\text{C}$ or less. In another embodiment, T_g is more than T_c , in which case the amount of the second hydrophobic monomer is preferably such that a coating formed from the composition has a tack at $(T_c + 10)^\circ\text{C}$ which is less than the tack at $(T_c + 10)^\circ\text{C}$

of a coating formed under the same conditions from a composition which is identical except that the crystalline polymer does not contain units derived from the second hydrophobic monomer. The amount of the second hydrophobic monomer is generally less than 50%, preferably 5 to 40%, particularly 5 to 30%, based on the BMC.

5 Preferred hydrophobic monomers are α , β -ethylenically-unsaturated monomers, particularly n-alkyl acrylates and n-alkyl methacrylates in which the n-alkyl groups contains 4 to 24 carbons.

Preferred first hydrophobic monomers are monomers whose homopolymers are side chain crystalline (SCC) polymers. SCC polymers are well known, and are
10 described for example in the following publications, to which reference should be made for a more complete disclosure of first hydrophobic monomers suitable for use in this invention: J. Poly. Sci. 60, 19 (1962), J. Poly. Sci. (Polymer Chemistry) 7, 3053 (1969), 9, 1835, 3349, 3351, 3367, 10, 1657, 3347, 18, 2197, 19, 1871, J. Poly. Sci., Poly Physics Ed 18 2197 (1980), J. Poly. Sci. Macromol. Rev. 8, 117 (1974), Macromolecules
15 12, 94 (1979), 13, 12, 15, 18, 2141, 19, 611, JACS 75, 3326 (1953), 76, 6280, Polymer J 17, 991 (1985), Poly. Sci USSR 21, 241 (1979), US Patent Nos. 4,380,855, 5,120,349, 5,129,180, 5,156,411, 5,254,354, 5,387,450, 5,412,035, 5,469,869, and 5,665,822. Particularly preferred first hydrophobic monomers are those which result in SCC polymers in which the side chain comprises a linear polymethylene group containing
20 12 to 50, preferably 14 to 22, carbons, or a linear perfluorinated or substantially perfluorinated polymethylene group containing 6 to 50 carbons. Mixtures of such hydrophobic monomers can be used. Preferred monomers are those which are commercially available, in particular the n-alkyl acrylates. Preferred first hydrophobic monomers for use in the invention comprise at least one of C12MA, C12A, C14A,
25 C14MA, C16A, C16M, C18A, mixtures of C18A, C20A and C22A, mixtures of C26A and C40A, fluorinated C8A, and mixtures of fluorinated C8A, C10A and C12A, and other monomers which produce substantially the same final polymers, e.g. acrylamides and methacrylamides.

Preferred second hydrophobic monomers are monomers whose
30 homopolymers have a T_g of -50 to 120°C, for example n-butyl, isobutyl, and tertiary butyl methacrylates, vinyl acetate, vinyl propionate, n-butyl and t-butyl acrylates, homopolymers of which have melting points of 32, 65, 107, 28, 10, 40, and 52°C, respectively. Examples of suitable second hydrophobic monomers are linear and branched chain alkyl, hydroxyalkyl and alkoxyalkyl acrylates, methacrylates, acrylamides, and methacrylamides,

and vinyl esters, in particular C8A, C8MA, 2-ethylhexyl acrylate and methacrylate, C6A, C6MA, C4A, C4MA and mixtures thereof.

(b) Hydrophilic Monomer Component (LMC)

The LMC comprises at least one hydrophilic monomer and is preferably present in an amount of 2 to 10%, particularly 2 to 5%. The hydrophilic monomer is preferably an $\alpha\beta$ -ethylenically unsaturated monomer, for example a vinylic compound such as acrylic acid; methacrylic acid; an alkyl, hydroxyalkyl or alkoxyalkyl acrylate or methacrylate (e.g. hydroxy ethyl methacrylate); acrylamide and methacrylamide; acrylic or methacrylic acid; acrylamide; methacrylamide; maleic anhydride; itaconic acid; a comonomer containing an amine group; and 2-acrylamido-2-methylpropane sulfonic acid (AMPS) and combinations thereof. Preferably the hydrophilic monomer is selected from the group consisting of acrylic acid, methacrylic acid, itaconic acid, 2-acrylamido-2-methylpropane sulfonic acid, acrylamide, methacrylamide, or hydroxyethyl (meth)acrylate or a mixture thereof.

(c) Crosslinking Monomer Component (XMC)

The XMC, if present, comprises at least one crosslinking monomer which contains at least two polymerizable groups, e.g. vinylic groups. The XMC is preferably used in amount such that the polymer has a gel content of at least 50%, particularly at least 60%, up to substantially 100%. Preferred hydrophobic crosslinking monomers include 1,4-butanediol diacrylate, 1,6-hexanediol diacrylate, 1,14-tetradecyldiol diacrylate, divinyl benzene, vinyl crotonate, divinyl ether, and 1,3,5-triallyl triazine trione, and mixtures thereof. Preferred hydrophilic crosslinking monomers include ethylene glycol diacrylate, and ethylene glycol dimethacrylate, and mixtures thereof.

The amount of crosslinking monomer is preferably such that the polymer has a crosslink density (number of crosslinks per weight average molecular weight) of at least 0.01, preferably at least 0.05, particularly at least 0.1, so that the polymer resists flow above T_m . A high gel content (e.g. crosslinking beyond 1 to 10 mole percent) is not generally needed and can result in decreased crystallinity and poor performance. The crosslinked polymer preferably has a heat of fusion of at least 10, preferably at least 20, J/g.

The use of an XMC is important when it is desirable for the coating to be easily removed, because the resulting crosslinked polymer particles are harder; and when water is evaporated from dispersion, the particles do not easily diffuse each other. The resulting coatings have a particulate character and as a result are more easily removable and frangible. This is particularly important for hair-setting compositions, since it is

desirable that the film-forming material be removable by washing hair with water. It is also particularly important for seed coatings; prior art non-particulate coatings can remain on the seed and inhibit seed germination. In the absence of crosslinking, when the water is evaporated, the latex particles are brought together by capillary action, and the water is squeezed out from the interstitial spaces. The particles coalesce and lose their identity, and a substantially uniform film results.

(d) Carboxyl-Containing Monomer Component

The monomer component can contain one or more monomers containing carboxyl groups, the carboxyl groups being partially, preferably at least 75%, neutralized (e.g. with NaHCO_3) after the polymerization is complete.

(e) Preferred Monomer Components

Preferred monomer components result in a crystalline polymer having a sharp melting point, preferably such that $(T_m - T_o)$ is less than 20°C , preferably less than 15°C , particularly less than 10°C , where T_o is the onset of melting on the DSC curve.

Particularly preferred monomer components comprise:

(i) 50 to 100%, preferably 65 to 95%, of at least one first hydrophobic monomer which is an alkyl acrylate, alkyl methacrylate, alkyl acrylamide, alkyl methacrylamide, alkyl vinyl ether or alkyl vinyl ester in which the alkyl group is an n-alkyl group containing 12 to 50 carbon atoms;

(ii) 0 to 35% of at least one second hydrophobic monomer which is an alkyl acrylate, alkyl methacrylate, N-alkyl acrylamide, alkyl vinyl ether, or alkyl vinyl ester in which the alkyl group is an n-alkyl group containing 4 to 12 carbon atoms; and

(iii) at least 2%, and preferably no more than 10% of at least one hydrophilic monomer which is acrylic acid, methacrylic acid, 2-acrylamido-2-methylpropane sulfonic acid, hydroxyethyl acrylate or methacrylate itaconic acid, acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, a tetraalkylammonium acrylate, vinyl acetate or N-vinyl pyrrolidone.

2. External Crosslinkers

External crosslinkers, when used, are generally compounds containing charged groups which interact with charged groups in the polymer. Preferred external crosslinkers contain metal (e.g. Mg, Mn, Zn, Ca, Ti or Zr) cations or bidentate or multidentate amine groups. Other external crosslinkers are non-metallic and organic compounds, e.g. triethylene tetramine, ethylene diamine, diethyl aminopropylamine and bis(quaternary ammonium) salts. The amount of external crosslinker is generally 0.1 to 10,

preferably 0.5 to 3%, based on the monomer component. Some external crosslinkers do not have any effect until a coating is prepared from the dispersion. For example, the cation can be present as an ammonia complex and not become effective until the ammonia is removed during the evaporation step. Thus, an aqueous solution containing $\text{Zn}(\text{NH}_3)^{++}$ ions can be used in this way.

External crosslinkers can be used in combination with crosslinking monomers.

3. Surfactants

The reaction medium for the polymerization comprises at least one surfactant, preferably at least one ionic surfactant and at least one non-ionic surfactant, to suspend and stabilize the particles formed by polymerizing the monomer component in the aqueous reaction medium. The amount of surfactant can be 0.8 to 10%, preferably 1 to 5%, based on the reaction medium. However, the optimum amount of surfactant depends also on the amount of cosolvent present, as further described below. Preferably, sufficient surfactant is present to enable the monomer component to be present initially as droplets having a diameter of more than 10 microns.

Surfactants are characterized by a hydrophile-lipophile balance (HLB) number that describes the strength of the hydrophilicity to the lipophilicity of the surfactant. Anionic surfactants having a HLB number of 20 to 40 are preferably used, and function to form micelles at low concentrations and to act as nucleation sites for the latex particles. Once nucleation is complete, the surfactants can additionally provide charge stabilization to the growing latex particles. Preferably the anionic surfactants contain a sulfate or sulfonate group and a hydrophobic moiety and may be, for example, alkyl sulfates, alkyl ether sulfonates and sulfates, alkylaryl sulfonates, and sulfosuccinates. Preferred anionic surfactants are the amine salt of dodecyl benzene sulfonic acid, salts of dioctyl sulfosuccinate, salts of lauryl sulfate, and salts of the ethoxylated alcohol half ester of sulfosuccinic acid. Exemplary alkyl and alkene sulfonates are described in U.S. Pat. Nos. 4,983,383 and 5,194,469.

Nonionic surfactants having HLB numbers of 5 to 35, e.g. 5 to 30, preferably 10 to 15, can also be employed. These surfactants lower the interfacial tension between the monomer oil droplets and the aqueous phase, and provide stabilization of the polymer dispersion by partitioning at the interface of the aqueous phase and the polymer particles. Thus they reduce the polymer dispersion's sensitivity to shear, temperature and the presence of electrolytes. The nonionic surfactants can be linear or branched ethoxylated alcohols, ethoxylated alkylphenols, or block copolymers of ethylene oxide and

propylene oxide. Preferably they contain 3 to 40 ethylene oxide repeat units and a hydrophobic moiety which may be a linear or branched C₁₁-C₁₅ secondary alcohol, nonylphenol or octylphenol, or are block copolymers of ethylene oxide and propylene oxide.

5 The amount of surfactant present is preferably such that high energy homogenization of the monomer component is not needed to form the latex. When little or no cosolvent is used, preferably a relatively large amount of surfactant (e.g. at least 5% based on the monomer component) is used so that the monomer component is dispersed in the reaction mixture as droplets having a diameter greater than 10 microns.

10 The amount of surfactant and cosolvent in the reaction mixture is preferably such that the units derived from the second hydrophobic monomer (if present) and/or the hydrophilic monomer are substantially randomly dispersed in the polymer.

 The surfactant can be a polymerizable component which is incorporated into the polymer.

15 The choice of the surfactant may be influenced by the end use of the dispersion. For example, particularly useful surfactants for compositions used for coating corn seeds are fluorine-containing surfactants.

4. Cosolvents

20 The reaction medium preferably contains at least one cosolvent (also referred to as a diffusion modifier) which increases the solubility of the hydrophobic monomer in the reaction medium. It is generally present in amount at least 10% but less than 30%, preferably 5 to 20%, based on the water. Because the cosolvent increases the water solubility of the hydrophobic monomer, it increases the transport rate of the hydrophobic monomer from the monomer micelles or oil droplets to polymer nucleation sites. The
25 cosolvents are preferably linear or branched monoalkanols containing 1 to 4 carbons, alkyl esters or alkyl ethers containing 1 to 6 carbons. Preferred cosolvents have a solubility in water of more than 0.7% at 25° C and have boiling points of 60° to 130°C, preferably less than 95°C, so that they can be easily removed after the polymerization reaction. Preferred cosolvents include ethanol, isopropanol, ethyl acetate, n-propanol, sec-butanol,
30 and t-butanol, and combinations thereof. Preferably the cosolvent has a water-octanol partition coefficient of at least 0.2 to enhance the solubility of the hydrophobic monomers in the water (see "Handbook of Property Estimation Methods," edited by W.J. Lyman, W.F. Reehl, D.H. Rosenblatt, American Chemical Society, Washington, D.C. 1990).

35 The amount of cosolvent preferably used depends upon the amount and type of surfactant used. For example, where there is about 1.6% of ionic and non-ionic

surfactants, at least 5% of the cosolvent is generally required to obtain a single sharp melting point crystalline polymer, whereas when about 0.8% of ionic and non-ionic surfactants is present, at least about 10% of the cosolvent is generally required.

5. Initiators

5 A free radical initiator must generally be present to cause the polymerization to take place, generally in amount 0.1 to 0.4% based on the reaction mixture.

Alternatively or additionally, ultraviolet radiation can be used to initiate the reaction.

Initiators useful in emulsion polymerization are well known [see, for example, U.S. Patent No. 5,516,865 and "Emulsion Polymerization," Blackley (1975), chapter 6,
10 Applied Science Publishers, London]. Suitable hydrophobic initiators for this invention include benzoyl peroxide and di-t-butyl peroxide. Suitable hydrophilic initiators include hydrogen peroxide and potassium and ammonium persulfate. A redox initiator, e.g. t-butyl hydroperoxide/ascorbic acid, or hydrogen peroxide/ferrous compound, can also be used.

6. Other Additives

15 The reaction mixture can contain a variety of other additives, including pH adjusters (e.g. sodium hydroxide and ammonium hydroxide); pH buffers (e.g. sodium bicarbonate and sodium hydrogen phosphate); coalescing agents (e.g. N-methylpyrrolidone, poly(ethylene glycol) alkyl ethers and poly(ethylene glycol); colloidal stabilizers (e.g. hydroxyethyl cellulose, polyacrylates and polyvinyl alcohols); rheology modifiers (e.g.
20 hydroxyethyl cellulose and the products available under the trade names Kelzan and VCAR from Kelco and Union Carbide, respectively); and defoamers (e.g. the products available under the trade names Surfynol and Anti-foam H-10 Emulsion from Air Products and Dow Corning, respectively. The addition of sodium bicarbonate tends to increase particle size.

25 B. Polymerization Conditions

1. Single Stage Polymerization

The polymerization is generally carried out at 45 to 90°C, preferably 60 to 80°C. Lower temperatures decrease the amount of coagulum and increase particle size uniformity. Preferably the reaction is carried out under oxygen-free conditions, e.g. under
30 nitrogen. Polymerization is preferably continued until at least 99% of the monomer component has been polymerized. Typically this takes 1 to 4 hours at about 70°C.

The polymerization is preferably carried out under conditions such that the polymer is obtained in the form of particles having an average size of less than 1 micron, preferably less than 0.5 micron, particularly 0.25 to 0.35 micron (measured by the well
35 known light scattering technique). Small particle sizes are desirable because the

dispersions are more stable, and do not clog spray nozzles. Preferably the amount of monomer is such that the reaction product has a solids content of at least 25%, particularly at least 30%, especially at least 35%. Higher solids content is desirable because less water needs to be evaporated to form a coating, and because the product is less expensive to package and transport. However, the solids content is generally no more than 45%, because of the tendency of very high solids content dispersions to coagulate spontaneously.

After the polymerization is complete, the cosolvent, if used, is generally removed. At this stage, further additives can be added to the latex, depending on the intended use of the product.

2. Two Stage Polymerization

In some applications it can be desirable in a first stage to polymerize the hydrophobic component thereby forming a crystalline copolymer or homopolymer, and then polymerizing the hydrophilic component in a second stage. This results in phase-separated particles having a core of predominantly (at least 50% by weight) crystalline polymer and a shell around the core, the shell being formed predominantly of non-crystalline polymer. Generally, the core is substantially all crystalline polymer as a first phase, and the shell is substantially all non-crystalline polymer as the shell. This is desirable when there is a need to change the properties of the crystalline polymer, such as tack, without changing the T_m . The monomers used to form the shell are not limited to hydrophilic materials, but can also be monomers such as styrene or butyl methacrylate.

For a core/shell product, T_m is substantially the same as the crystalline homopolymer formed from the first hydrophobic monomer.

As in the single stage polymerization, the final latex preferably has a solids content of at least 30% and a residual monomer content of less than 1%; and the surfactant likewise preferably is present in amount such that the latex particles have an average particle size of less than 0.1 micron, particularly less than 0.5 micron.

C. Use of the Dispersions

The dispersions can be used to provide coatings on any solid substrate, e.g. fibers, seeds, or a shaped object. They can be applied to the substrate by means of conventional coating techniques such as wire-wound rod, direct gravure, offset gravure, reverse roll, air-knife, trailing blade coating, and spray coating. The coating is typically dried at a temperature at least 5°C above T_m of the crystalline polymer, under ambient conditions or by the application of heat.

1. Coating of Fibrous Materials

Compositions for treating fibrous materials preferably (a) contain 2 to 50% by weight of the particles comprising the crystalline polymer, and/or (b) contain substantially no organic solvents, and/or (c) contain less than 1% by weight of residual monomer. Pref rably the composition is a latex prepared as described above, and for many purposes the polymer has a T_m of 20° to 60°C, particularly 40° to 60°C.

The composition can, for example, be dispensed from a pressurized container, or from a pump spray, or applied by means of a pad. The compositions can be used in place of starch, in which case the crystalline polymer has a T_m usually from 40 to 60°C, which enables the polymer to be reset with an iron, but does not result in the polymer becoming reset in a clothes dryer. Alternatively, the polymer can give the fabric a "permanent press" character, by choosing a polymer having a T_m sufficiently high that it does not easily reset, e.g. at least 60°C, preferably at least 80°C. A similar result can be achieved by crosslinking the crystalline polymer after the fabric has been coated, e.g. by using an external crosslinker.

Compositions for treating fabrics preferably include an effective amount of at least one fabric-treating additive, this term being used to denote any compound conventionally used to affect the properties of a fabric. The amount of each such additive is preferably at least 0.1% by weight of the composition. Suitable additives include perfumes, scents, stain resisters, optical brighteners, wetting agents, preservatives, softeners, ironing aids (typically 0.05 to 1.5% by weight of a silicone, e.g. dimethyl or methylphenyl silicone or an amine-modified silicone), anti-static agents, and bleaching agents (e.g. as described in Kirk-Othmer, Encyclopedia of Chemical Technology, 4th edition, John Wiley & Sons, volume 4, pages 271 et seq., and 552 et seq.). The composition can also contain a stabilizer, e.g. a naturally-occurring starch derived from corn, rice, wheat, or tapioca, or a modified starch, or carboxymethyl cellulose or a clay can also be employed.

Compositions for treating hair (particularly human hair, but also hair on a wig, or hair on a doll) preferably include an effective amount of at least one hair care additive, this term being used to denote any compound conventionally used in hair treating formulations. The amount of each such additive is preferably 0.01 to 10%, preferably 0.05 to 5%, based on the composition. Suitable additives include sequestering agents, hair-conditioning agents (e.g. cetyl trimethyl ammonium chloride, glyceryl monostearate, glycerin, propylene, glycol, sorbitol, urea, isopropyl myristate, balsam, lanolin, spermaceti, and isopropyl palmitate), anti-dandruff agents (e.g. sulfur, salicylic acid, resorcinol,

bithionol, chloral hydrate, and zinc pyrithone), reducing agents (e.g. thioglycolates), bleaching agents (e.g. hydrogen peroxide, and perborate and persulfate salts), scents, perfumes, pearlescent aids (e.g. ethylene glycol distearate), preservatives (e.g. benzyl alcohol, methylparaben, propylparaben, imidazolidinyl urea, and esters of p-hydroxybenzoic acid), thickeners (also known as viscosity modifiers, e.g. methyl cellulose, starches and starch derivatives), coloring agents (e.g. any of the FD&C or D&C dyes), and pH adjusting agents (e.g. citric acid, sodium citrate, succinic acid, phosphoric acid, sodium hydroxide, and sodium carbonate). Other hair care additives are described in the "COSMETIC INGREDIENT DICTIONARY" published by "THE COSMETIC TOILETRY AND FRAGRANCE ASSOCIATION INC.", U.S. Patent No. 5,009,880, and Kirk-Othmer, Encyclopedia of Chemical Technology, 4th Ed., Vol. 12, John Wiley & Sons, pages 881-917.

The pH of the hair-treating composition is typically 3 to 9, preferably from 6 to 7. For application to human hair on a person, T_m is preferably at least 40°C so that the hair does not become unset at high ambient temperatures, but generally is no more than 60°C, so the hair can be reset with a hair dryer or curling iron. A particular advantage of the present invention is that the coatings can be applied to hair, and the hair can be repeatedly reset. Thus, the hair can be set in a desired configuration, and then by heating the crystalline polymer to a temperature greater than T_m , the hair can be reset into a second desired configuration. However, when the hair is on a wig or a doll, it can be desirable to set the hair more permanently. In such a case, T_m is sufficiently high, preferably at least 60°C. Alternatively, or in addition, the composition can be externally crosslinked, as described above.

When a coating is formed on human hair, it is generally desirable that the coating can be easily removed by washing with water. This can be achieved by using a monomer component which contains (a) an XLC as described above, and/or (b) at least 0.5% of at least one amphoteric monomer, and/or (c) a carboxyl-containing monomer component as described above.

2. Coating of Seeds or Other Organisms

When seeds or other organisms are coated, the aqueous dispersion should be non-phytotoxic to the organism being coated. The dispersion is preferably applied by spray coating, the water then being evaporated by external heating or under ambient conditions. Other known application methods can be used. The thickness of the coating and the T_m of the polymer are preferably such that the coating is substantially impermeable to water at temperatures below T_m . Generally, the T_m of the polymer is from 0 to 40°C, preferably 10 to 35°C, and is equal to or greater than the lowest temperature at which the

seed can germinate satisfactorily, and less than the highest temperature at which the seed can germinate satisfactorily. Preferably T_m is substantially equal to, or greater than, the optimum germination temperature of the seed. Minimum, optimum and maximum germination temperatures for different seeds are known to, or can be determined by, those skilled in the art (see, for example, Plant Propagation: Principles and Practice, by Hartman and Kester, 1959). At temperatures above T_m , the coating becomes substantially permeable to water. In this way, the coating prevents substantial imbibition of water by the seed at too low a temperature, thus preventing "imbibitional chilling injury" and extending the dormancy of the seed, but permits the seed to imbibe water at temperatures at which germination can take place satisfactorily. It is not necessary for the coating to be completely impermeable to water at temperatures below T_m , and the term "substantially impermeable" should be understood accordingly. For example, the coating preferably ensures that the seed imbibes no more than 21%, more preferably no more than 17%, particularly no more than 15%, especially no more than 10%, of water over a period of 48 hours at temperatures below T_m . Similarly, the coating need not be completely permeable to water above T_m and the term "substantially permeable" should be understood accordingly. For example, the coating preferably has a permeability to water above T_m which is at least 2 times, particularly at least 3 times, its permeability below T_m . For example, at temperatures above T_m , the coating preferably permits the seed to imbibe 25% or more, particularly 60% or more of water over a period of 48 hours at temperatures above T_m .

The permeability of the coating, as well as the value of T_m , can be adjusted for the needs of the particular seed. For example, for corn seed, the coating preferably prevents the seed from imbibing more than 10% of water over a period of 48 hours below T_m , but permits the seed to imbibe more than 10% of water over a period of 48 hours above T_m . More than one coating can be applied to the seed.

The polymers used for coating seeds are preferably derived from a monomer component which includes a second hydrophobic monomer. Polymers which lack such a monomer tend to be difficult to apply, and to form tacky, relatively poor quality coatings. It is also preferred that the monomer component should contain a crosslinking component and that an external crosslinker should be employed. These measures result in a coating which maintains its integrity well below T_m , but which disintegrates easily when the seed expands, and which does not, therefore, interfere with germination and growth. Other measures which can be employed for the same purpose are the use of a monomer

component which includes (a) at least 0.5% of at least one amphoteric monomer, and/or (b) a carboxyl-containing monomer component.

Although the foregoing description is directed principally to coating seeds for controlling the dormancy of the seed, the invention is useful for other organisms, and other purposes, e.g. to protect organisms from fungi and insects. Such other organisms include bacteria, embryos, eggs, sprouts, bugs, rhizobium, seedlings, and potato cuttings. Seeds which can be coated include vegetable seeds and grain seeds. For example, seeds for canola, maize, cotton, soybean, sugar beets, beans, tomato, potato, tobacco, corn, rice, wheat, sunflower, the brassica family, the solanaceae family, sorghum, barley, lentils, melons, cucumbers, cabbage, brussels sprouts, beans, and peas.

The composition applied to the organism can contain one or more additives, typically in amount 0.01 to 10%, preferably 0.05 to 5%, based on the composition. Suitable additives include colorants, fillers, soil pH adjusters, nutrients, seed protectors, phytotoxicity inhibitors, herbicides, growth regulators, soil improvers, fungicides, insecticides, growth stimulants, plant hormones, fertilizers, bird repellents, stimulants to accelerate growth, and inoculants. Such additives can alternatively or additionally be applied to the seed separately.

The invention is illustrated in the accompanying drawings, in which Figures 1-6 are DSC curves for polymers prepared in the Examples, as further described below, and Figures 7 and 8 are schematic illustrations of a particulate coating 10, made up of coalesced but still identifiable particles 14, on a substrate 12, which is a fiber or a seed, respectively.

EXAMPLES

The invention is illustrated by the following examples, some of which are comparative examples.

Examples 1-16

Examples 1-16 illustrate the preparation of aqueous polymer dispersions.

Examples 1, 5, 6, 9 and 10 are less preferred, in that the crystalline polymer does not have a single, sharply defined melting temperature.

The following abbreviations are used in Examples 1-16 (and in the later Examples): C6A, hexyl acrylate (amorphous hydrophobic monomer); C12A, dodecyl acrylate, C14A, tetradecyl acrylate, C16A, hexadecyl acrylate, and C18A, octadecyl acrylate (all crystalline hydrophobic monomers); C6DA, 1,6-hexanediol diacrylate, and

CD14A, 1,14-tetradecanediol diacrylate (both crosslinking monomers); AA, acrylic acid, and MA, methacrylic acid (both hydrophilic monomers); C12SH, dodecyl mercaptan (chain transfer agent); SP, sodium persulfate (initiator); PP, potassium persulfate (initiator); SBC, sodium bicarbonate (buffer); EAC, ethyl acetate (cosolvent); IPA, isopropanol (cosolvent).

5 The following are surfactants: SDS, sodium dodecyl sulfate; 15-S-7, 15-S-9 and 15-S-40 are C₁₁-C₁₅ secondary alcohol ethoxylates which are available from Union Carbide under the trade names Tergitol 15-S-7, 15-S-9 and 15-S-40, respectively; P1059, an amine salt of dodecyl benzene sulfonic acid which is available from Witco under the trade name Witconate P1059; EMC, sodium dioctyl sulfosuccinate which is available from
10 Witco under the trade name EMCOL DOSS; SLS-R which is a 30% by weight lauryl sulfate solution in water available from Lonza, Inc under the trade name Carsonol SLS-R; and A-102 which is a disodium ethoxylated alcohol half ester of sulfosuccinic acid available from Cytec under the trade name AEROSOL A-102.

 The amounts of each ingredient used in the Examples are shown in Tables 1-
15 3.

 Examples 1-8 illustrate how addition of cosolvent and high surfactant concentrations reduce the heterogeneity of emulsion polymerization reaction products prepared by using at least two different monomer components. Examples 1-4 show the effect of the addition of cosolvent in the presence of high surfactant concentrations on the
20 heterogeneity of the polymerization reaction products. Examples 5-8 show the effect of the addition of cosolvent in the presence of low surfactant concentrations on the heterogeneity.

Examples 1-4

25 Polymers consisting of four monomer components (C16A, C6A, CD14A and MA) were prepared in the presence of a constant amount of surfactant (3.2%) and variable amounts of cosolvent as shown in Table 1. The emulsion polymerization components were mixed and degassed for 30 minutes. The polymerization reaction proceeded for 4 hours at 70°C under nitrogen. The polymer prepared in comparative Example 1 in the absence of
30 cosolvent exhibited a broad profile with two peaks on a DSC thermograph as shown in Figure 1. The polymer prepared in Example 2 in the presence of 5% by weight ethanol shows a much sharper DSC peak and a lower T_m. The polymer prepared in Example 3 in the presence of 5% by weight ethyl acetate similarly exhibits a sharp peak. Addition of higher concentrations of ethyl acetate above 5% only has a slight effect on the sharpness
35 of the DSC peak and the T_m of the polymer product as shown in Figure 2.

Examples 5-8

Polymers consisting of three monomer components (C16A, C6A, and MA) were prepared in the presence of a constant, but lower, amount of surfactant (1.6%) and variable amounts of cosolvent as shown in Table 1. The emulsion polymerization components were mixed and degassed for 30 minutes. The polymerization reaction proceeded for 4 hours at 70°C under nitrogen. The polymer prepared in comparative Example 5 in the absence of cosolvent exhibits multiple DSC peaks. The polymer prepared in comparative Example 6 in the presence of 5% by weight ethyl acetate shows a single DSC peak and a lower T_m . The polymer prepared in Example 7 in the presence of 10% by weight ethyl acetate exhibits a sharp peak (Figure 3). Addition of higher concentrations of ethyl acetate above 5% only has a slight effect on the sharpness of the DSC peak and the T_m of the polymer product.

TABLE 1

	Ex. 1	Ex. 2	Ex. 3	Ex. 4	Ex. 5	Ex. 6	Ex. 7	Ex. 8
H ₂ O	200 g	190 g	190 g	180 g	200 g	190 g	180 g	160 g
C16A	70 g	70 g	70 g	70 g	70 g	70 g	70 g	70 g
C6A	25 g	25 g	25 g	25 g	25 g	25 g	25 g	25 g
MA	5 g	5 g	5 g	5 g	5 g	5 g	5 g	5 g
C14DA	2 g	1.5 g	1.5 g	1.5 g	-	-	-	-
15-S-9	5 g	5 g	5 g	5 g	2.5 g	2.5 g	2.5 g	2.5 g
P1059	5 g	5 g	5 g	5 g	2.5 g	2.5 g	2.5 g	2.5 g
PP	0.4 g	0.4	0.4 g	0.4 g	0.4 g	0.4 g	0.4 g	0.4 g
EAc	-	-	10 g	20 g	-	10 g	20 g	40 g
Ethanol	-	10 g	-	-	-	-	-	-
DSC	broad peak	sharp peak	sharp peak	sharp peak	multiple peaks	broad peak	sharp peak	sharp peak
T_m (°C)	30.7	22.5	21.9	21.6	34.8	33.0	32.6	22.4

Examples 9-12

Polymers consisting of two SCC monomer components (C16A and C12A) and MA were prepared. Both C16A and C12A -based polymers are side chain crystalline polymers and can be detected by DSC whereas C6A polymers are amorphous and not detectable. The polymers were prepared in the presence of varying concentrations of surfactants and cosolvents as shown in Table 2. The emulsion polymerization components were mixed and degassed for 30 minutes. The polymerization reaction proceeded for 4

hours at 70°C under nitrogen. The polymer prepared in comparative Example 9 in the presence of a low surfactant concentration (1.2%) in the absence of cosolvent exhibited two distinct peaks with T_m 's at 1.6°C and 33.7°C as shown in Figure 4. The polymer prepared in comparative Example 10 in the presence of the same amount of surfactant and 5% by weight ethyl acetate shows a broad peak with three peaks with the predominant polymer species having a T_m of 2.7°C. The polymer of Example 11 was prepared in the presence of higher concentrations of surfactant (2.4%). Increasing the surfactant concentration produces a polymer product with a sharp T_m at 13.9°C as shown in Figure 5. Example 12 shows the use of different monomer components (C14A and C12A) in a reaction mixture similar to that of Example 11. Once again only one peak is observed as shown in Figure 6.

TABLE 2

	Ex. 9	Ex. 10	Ex. 11	Ex. 12
H ₂ O	200 g	190 g	400 g	400 g
C16A	35 g	35 g	70 g	-
C14A	-	-	-	95 g
C12A	60 g	60 g	120 g	95 g
MA	5 g	5 g	10 g	10 g
15-S-9	2 g	2 g	8 g	8 g
DOSS	2 g	2 g	8 g	8 g
PP	2 g	0.4 g	1.6 g	1.5 g
EAc	-	10 g	-	-
C12SH	-	-	-	0.1 g
DSC	two peaks	broad peak	sharp peak	sharp peak
T_m (°C)	2, 33.7	2.7	13.9	16.1

Examples 13-15

These examples show the large scale preparation of copolymers using the method described in this invention. Reaction components are shown in Table 3.

In Example 13 the emulsion polymerization components were mixed and degassed for 30 minutes. The polymerization reaction proceeded for 4 hours at 70°C under nitrogen. The polymer was polymerized in the presence of a total surfactant concentration of 2.9% in the presence of 20 % cosolvent. The polymer product exhibited a peak with a T_m of 11.3°C.

In Example 14 the emulsion polymerization components were mixed and degassed for 30 minutes. Part of the polymerization reaction mixture (25%) was metered into a 1 liter resin kettle for 10 minutes at a rate of 12 ml/minute. The mixture was polymerized for 15 minutes at 80°C. The rest of the monomer solution was metered over 75 minutes and the polymerization reaction proceeded for 2 more hours under nitrogen. The polymer product exhibited a peak with a T_m of 9°C.

In Example 15 all the polymerization components, except for the initiator, were mixed and degassed. Once the polymerization components were heated to 60°C, degassed initiator was added to the reaction mixture. The reaction proceeded for two hours while maintaining the internal temperature of the mixture at 70°C. After two hours more initiator was added to the reaction mixture to drive polymerization to completion. The reaction proceeded for a total of 5 hours. The reaction was cooled overnight. After cooling the product was neutralized to pH 7 with ammonium hydroxide and filtered with a 63 micron sieve. The polymer exhibited a single sharp peak at 9.2°C.

TABLE 3

	Ex. 13	Ex. 14	Ex. 15
H ₂ O	800 g	320 g	4308 g
C14A	405 g	160 g	2080 g
C6A	70 g	30 g	390 g
C6DA	-	1.4 g	18.2 g
MA	25 g	5 g	130 g
AA	-	10 g	-
A-102	20 g	8 g	104 g
SLS	10 g	4 g	52 g
15-S-7	10 g	4 g	52 g
15-S-40	2.5 g	4 g	13 g
PP	2 g	0.8 g	15.6 g
SBC	2 g	0.8 g	10.4
IPA	200 g	80 g	1040 g
DSC	sharp peak	sharp peak	sharp peak
T_m (°C)	11.2	9.1	9.2

Example 16

A polymer was prepared with 2-acrylamido-2-methylpropane sulfonic acid (AMPS, available from Lubrizol) as follows. C16A (31.5 g), AMPS (6 g of a 50% aq. solution), water (80 g), isopropanol (20 g), Aerosol A-102 (2 g), Carsonol SLS-R (1 g) were

mixed together and purged with N_2 for 20 min. The bottle was then capped and heated to 80°C, and 0.4 g of potassium persulfate was added. The reaction was carried out at 80°C for 3 h. A bluish tan emulsion was formed, cooled overnight and neutralized with ammonium hydroxide.

5

Examples 17-24

Examples 17-24 illustrate the preparation and use of aqueous polymer dispersions for coating fibers. The molecular weights (which are given as M_n values, i.e. number average molecular weights, or M_w values, i.e. weight average molecular weights) were measured by the standard GPC technique in tetrahydrofuran, against polystyrene standards. The following additional abbreviations are used in these and later Examples. C4A, butyl acrylate (amorphous monomer); ESH, mercaptoethanol (chain transfer agent); AIBN, azobisisobutyronitrile (initiator); ESP, t-amylperoxy 2-ethyl hexanoate which is available from WITCO under the trade name Esperox 570 (initiator); TERG, a C_{11} - C_{15} secondary alcohol ethoxylate which is available from Union Carbide under the trade name Tergitol 15-S-9 (surfactant).

10

15

Example 17

A mixture of C18A (1865 g), MA (150 g) and C12SH (1 g) was added over a period of 20 minutes to a reaction vessel which was purged with nitrogen, stirred, and maintained at 100°C. Over the same period, ESP (10 g) was added separately. After 5 hours, the temperature was raised to 120°C, and heating continued for a total reaction time of 23 hours. The resulting white polymer had an M_w of 198,000, M_n of 26,000, T_g of 43°C and T_p of 45°C.

25

Example 18

A sample of the polymer produced in Example 17 was finely ground and was added to a mixture of water (90 ml), TERG (1.25 g) and P-1059 (1.25 g) which was maintained at 80°C in a stirred reaction vessel. After 2 hours of mixing, a stable emulsion had been produced.

30

Example 19

A mixture of C18A (95 g), MA (5 g) and C12SH (0.05 g) was added to a mixture of water (200 ml), TERG (5 g) and EMC (5 g) which was maintained at 80°C in a stirred reaction vessel. After degassing with nitrogen for 30 minutes, PP (0.4 g) was

35

added. Heating was maintained for 4 hours, and after the reaction mixture had cooled slowly to room temperature, it was neutralized with 10% aqueous ammonium hydroxide. The resulting milky white polymer had a T_g of 43°C, T_p of 47°C, and a M_w above 1,500,000.

5

Example 20

A mixture of C16A (400 g), C12A (90 g), AA (10 g) and C12SH (105 g) was added over a period of 10 minutes to a reaction vessel which was purged with nitrogen, stirred, and maintained at 110°C. Over the same period, ESP (5 g) was added separately. Heating was continued for 4 hours. The resulting polymer had an M_w of 2300, M_n of 1500, T_g of 21°C and T_p of 28°C.

10

Example 21

A mixture of toluene (200 ml), C18A (89 g), C16A (11 g), ESH (3.6 g) and AIBN (1 g) was heated under nitrogen at 60°C for 16 hours and then at 80°C for 2 hours. Isocyanatoethyl methacrylate (8 g) and dibutyl tin dilaurate (1 drop) were then added, and heating continued at 60°C for 4 hours. The resulting polymer was precipitated by the addition of ethanol and was a white polymer having an M_w of 5300, M_n of 4080, T_g of 39°C and T_p of 45°C.

15

20

A part of the resulting polymer (20 g), C4A (30 g), AIBN (0.5 g), ethyl acetate (50 ml) and heptane (50 ml) were heated under nitrogen at 60°C for 16 hours. The resulting polymer was precipitated by the addition of ethanol and was a white thermoplastic elastomer having an M_w of 516,000, M_n of 34,000, T_g of 39°C and T_p of 44°C.

25

Example 22

The procedure of Example 19 was followed except that one portion (Portion A) of the cooled reaction mixture was not neutralized and another portion (Portion B) was treated with enough sodium hydroxide to neutralize 50% of the carboxyl groups. Samples of the resulting latex were tested as follows. 300 mg samples of the latex (containing 100 mg of the polymer) were placed on glass slides, and dried at 50°C for 1 hour. The coated slides were then placed in baths containing a 0.5% solution of Palmolive Plus dishwashing fluid in water, and maintained at 25°C (i.e. below the T_g of the polymer), 53°C (i.e. at about the T_p of the polymer) and 75°C (i.e. well above the T_p of the polymer). The baths were stirred gently and the slides were observed.

30

35

The Portion A film, at 25°C, separates from the slide after 30 minutes, without swelling or blistering; when the film, after it has separated, is lifted out of the bath on the slide and dried, it remains intact and transparent. The Portion A films, at 53°C and 75°C, swell and blister, and separate from the slide after 25 minutes. When the films, after they have been separated, are lifted out of the baths on the slides, and dried, they show some disintegration and are opaque.

The Portion B film, at 25°C, blisters and separates from the slide after 30 minutes; after removal and drying, it remains intact and transparent. The Portion B films, at 53°C and 75°C, blister and become opaque and separate from the slides after 3 minutes; after removal and drying, they disintegrate completely.

Example 23

The procedure of Examples 18 and 19 were followed to generate a water based emulsion of SCC polymer. The milky white formulation was applied to the hair of a doll through a pump spray bottle. The hair was then heated with a hair dryer, evaporating the water and melting the SCC polymer. While the polymer was in the molten state, the doll's hair was shaped in a desired configuration.

When the doll's hair needed to be set in another configuration, the hair was first reheated to melt the composition retained in the hair. The hair was then reshaped in the new configuration. This process was repeated several times, and each time the doll's hair retained the new desired configuration.

Example 24 (Prospective Example)

The procedure of Examples 18 or 19 is followed to generate a water based emulsion of SCC polymer. Fabric is dip coated in the milky white formulation and allowed to dry. The dried fabric is placed in the desired configuration and heated and pressed with an iron to melt the SCC polymer. The fabric is cooled in the desired configuration.

Examples 25-52

Examples 25-52 show the preparation and use of aqueous polymer dispersions for coating seeds.

The following additional abbreviations are used in these Examples TTT, 1,3,5-trialllyl triazine trione (crosslinker); BDE, 1,4-butanediol divinyl ether (crosslinker); TETA, triethylene tetramine (external crosslinker); AH, 10% aqueous ammonium hydroxide available from Baxter; CC, calcium carbonate under the trade name Albaglos, 0.6 microns,

available from Specialty Minerals; Zinplex 15 is available from Rohm and Haas (external crosslinker); DEAPA, N, N-Diethyl aminopropylamine is available from Aldrich (external crosslinker); Colloid 211 is a water soluble polyacrylate polymer obtained from Rhone-Poulenc that acts as a dispersant for the calcium carbonate; Defoamer 2010 is available from Dow Corning and is a low surface energy silicone polymer, and Seedmate seed colorant is a product of Loveland Industries Inc. NP, n-propanol (cosolvent).

The following is a surfactant: Lodyne S-106A, a fluorosurfactant available from Ciba-Geigy.

10 Examples 25-32 (Preparation of Polymer Latex)

A polymer latex for Example 25 was prepared by mixing together C16A (68 g), C6A (27 g), MA (5 g), C4DA (1 g), water (160 g), IPA (40 g), A-102 (2 g), SLS-R (2 g), 15-S-7 (2 g), 15-S-40 (0.5 g), and SBC (0.4 g) in a bottle. The bottle was purged with N₂ for 30 min. The bottle was then capped and heated to 70°C, and then PP (0.4 g) was added. The reaction was carried out at 70°C for 4 h. The reaction exothermed rapidly and a blue latex was formed. The latex was cooled and neutralized with aqueous ammonia.

The latices of Examples 26, 27, and 28 were prepared in the same way described for Example 1 with the same ingredients and amounts as in 25, except that TTT and BDE were substituted for C4DA in Examples 26 and 27, respectively. Example 28 was prepared in the absence of an internal crosslinker.

In Example 29 an internally crosslinked polymer was prepared, where the crosslinking component was 1,4-butanediol diacrylate. The monomers were mixed together: C16A (68 g), C6A (27 g), MA (5 g), 1,4-butanediol diacrylate (1 g). An aqueous phase was prepared with water (160 g), isopropanol (40 g), Aerosol A-102 (4 g), Carsonol SLS-R (2 g), Tergitol 15-S-7 (2 g), Tergitol 15-S-40 (0.5 g), NaHCO₃ (0.4 g), and potassium persulfate (0.4 g). The reagents were mixed together and purged with N₂ for 30 minutes in a bottle. The bottle was then capped and heated to 70°C, and 0.4 g of potassium persulfate was added. The reaction was carried out at 70°C for 4 hours. The reaction exothermed rapidly and a blue latex was formed. The latex was cooled and neutralized with aqueous ammonia.

For Example 30 a polymer was prepared with 2-acrylamido-2-methylpropane sulfonic acid (AMPS). C16A (31.5 g), AMPS (6 g of a 50% aq. solution), water (80 g), isopropanol (20 g), Aerosol A-102 (2 g), Carsonol SLS-R (1 g) were mixed together in a bottle and purged with N₂ for 20 min. The bottle was then capped and heated to 80°C,

and 0.4 g of potassium persulfate was added. The reaction was carried out at 80°C for 3 h. A bluish tan emulsion was formed, cooled overnight and neutralized with ammonium hydroxide.

For Example 31 a polymer was prepared in a glass lined Pflaude reactor by mixing
 5 C16A (6555 g), C6A (2470 g), MA (475 g), C6DA (66.5 g), SLS (190 g), A-102 (380 g),
 15-S-7 (190 g), 15-S-40 (47.5 g), water (15,000 g) and IPA (3800 g). The mixture was
 sparged with nitrogen for an hour. The contents of the reactor were raised to 65 C, and
 an initiator solution of 38 g potassium persulfate in 380 g water as added. The reactor was
 maintained at 70 C for 2 hours. A chaser solution of 19 g of potassium persulfate in 380
 10 g water was added and the reactor contents maintained at 70 C for an additional three
 hours, and cooled to room temperature. The latex was neutralized with AH and filtered
 through a 63 micron wire mesh filter.

For Example 32, a polymer was prepared in a glass lined Pflaude reactor by mixing
 C14A (2158 g), C6A (312 g), AA (130 g), C6DA (18.2 g), SLS (52.2 g), A-102 (105.5 g),
 15
 15-S-7 (54.7 g), 15-S-40 (13 g), water (4,061 g) and IPA (1045 g). The mixture was
 sparged with nitrogen for 30 minutes. The contents of the reactor were raised to 65 C,
 and an initiator solution of 10.4 g potassium persulfate in 104 g water as added. The
 reactor was maintained at 70 C for 2 hours. A chaser solution of 5.2 g of potassium
 persulfate in 104 g water was added and the reactor contents maintained at 70 C for an
 20 additional three hours, and cooled to room temperature. The latex was neutralized with
 AH and filtered through a 63 micron wire mesh filter.

Example 33 (Preparation of Seed Coating Formulations)

Seed coating formulations were prepared that contained:

Type I. Polymer latex containing no internal or external crosslinker
 (using the latex of Example 28);

Type II. Polymer latex with internal crosslinks (using the latex of
 Example 25);

Type III. Polymer latex prepared with an external crosslinker (using the
 latex of Example 28 in the presence of Zn^{2+}); and

Type IV. Polymer latex with internal and external crosslinks (using the
 latex of Example 25 in the presence of TETA).

The following procedure was followed to prepare formulations of Type I and

II:

A wet grind was prepared consisting of Colloid 211 (1 g), water (20 g), AH (10 g), polymer latex (100 g), and CC (120 g). The wet grind was prepared in a Cowels mixer at 3000 rpm for 30 min (shear rate 126 sec^{-1}). The let down was prepared by mixing (VIRTIS Shear mixing at 2000 rpm for 10 min) and consisted of wet grind (125 g),
 5 polymer latex (550 g), water (1200 g), and seed colorant (5 g). AH (10 g) was added to the formulation preparations. The let down was used directly to coat the seeds.

For Type III formulations, external crosslinker was added to the let down prior to coating. For example, Zinplex 15 (2.3 g) was added to the type I formulation during the let down (970 g) to form a coating solution. Type III formulations were
 10 prepared as follows:

CC (40 g) and water (100 g) were sheared in a VIRTIS at 2000 rpm, and Colloid 211 (0.5 g) mixed with 3 ml water was slowly added and sheared for 2 min. The latex (400 g equivalent to 120 g polymer) was made basic with 10% AH, 4-5 ml and was slowly added followed by the Zinplex and DEAPA (both diluted with 2-3 ml of water) and
 15 sheared for about 5 min. Water (500 g) and red dye (3 ml) were added. The coating solution was then filtered through a 63 micron mesh filter. Towards the end of the filtration 2 drops of defoamer were added.

For Type IV formulations, external crosslinker was added to the let-down during its preparation. For example, TTM (2.4 g) was added to the type II formulation let
 20 down (940 g) or Zinplex (8.6 g) was diluted with 20 g water and added to the type II formulation let down (1895 g). Type IV formulations were prepared as follows:

A wet grind was prepared from Colloid 211 (2 g), water (20 g), aqueous AH (20 g), latex (250 g) and CC (360 g). The grind was mixed by blending in a Cowels mixer at 3000 rpm for 30 min. A concentrate preparation was made from wet grind (650 g),
 25 latex (2150 g), Zinplex 15 (18.4 g), and Seedmate Colorant (25 g). The coating solution was prepared by diluting the concentrate (540 g) with water (880 g).

All of these formulations have a T_m of about 19-21°C.

Examples 34-46 (Seed Testing)

Seed Coating Procedure

Seeds were coated with the formulations of Example 33 using seed coating equipment for water based coatings manufactured by Diamond Coating Equipment (Tucson, Arizona). The seed coating equipment consisted of a perforated pan fitted with
 35 baffles, and capable of handling about 20 lbs of seed/batch. The seeds were coated with

FC110591142114

a fine spray of the formulation from a spray nozzle located in the coating pan. To assist in drying of the seeds the coater was equipped with a hot air inlet and an air exhaust.

An exemplary coating procedure involving soybeans utilized Soybeans (6 kg), which were loaded into the seed coating equipment. The coating formulation was pumped to the spray nozzle using a peristaltic pump. The pan was rotated at a rate of 12-13 rpm to keep the seeds thoroughly mixed. The coating was started by turning the spray nozzle on pneumatically, and pumping at a rate of 30 ml/min. The pan temperature was maintained at 30°C and the coating was carried out for 17 min. The spray nozzle was shut off, the pan rotation stopped, and the coated seeds were removed.

Seed Testing

Seeds were tested for water uptake and germination/plant emergence as a function of temperature under controlled conditions. The testing methods used are similar to those prescribed by the Association of Seed Analysts (AOSA) testing methods, and Rules of Testing Seeds (Association of Official Seed Analysts. Journal of Seed Technology, Vol 12, No: 3, 1988). The performance of the coated soybean seeds were measured by the water uptake of the seeds at two temperatures at 10 and 25°C at 48 h, and the germination of the seeds at 25°C for 7 days, and at 10°C for 7 days followed by 7 days at 25°C. Table 2 gives the water uptake of representative coatings along with the water uptake of the uncoated seed (Example 34) used as a control.

Paper Towel Germination Test

Germination paper sheets [Anchor #38 and #76 seed germination paper (254 x 381 mm)] were allowed to equilibrate for about 30 min with approximately two times their dry weight of water.

Two moistened sheets were placed on the benchtop, and 10 g of seeds were placed along the length of the paper, about a third of the length from the top. Another wet sheet of paper was placed on top. A hem about 25 mm wide at the bottom was folded and the sheets rolled, and set vertically. Four to five such paper dolls were secured loosely with a pair of rubber bands and were placed vertically in a plastic bag and placed in incubators maintained at 10°C and 25°C, respectively. After the specified amount of time (48 hours), the seeds were removed and weighed.

TABLE 2

Example	Type	Polymer Latex	Coating Type	% Water Uptake at 10 °C	% Water Uptake at 25 °C
34	Control	No coating	No coating	102	120
35	II	C16A/C6A/AA/C14DA (68/27/5/1)	Internal X-linker	11	80
36	IV	C16A/C6A/AA/C14DA (68/27/5/1)	Int. and 0.5% Zn External	13	92
37	IV	C16A/C6A/AA/C14DA (68/27/5/1)	Int. and 2% TETA Ext	20	99
38	IV	C16A/C6A/AA/C14DA (68/27/5/1.5)	Int, 1% Zn Ext	18	82
39	IV	C16A/C6A/AA/C14DA (68/27/5/1.5)	Int, 1.5% Zn Ext	30	92
40	IV	C16A/C6A/MA/C14DA (68/27/5/1)	Int, 0.5% Zn Ext	25	84
41	II	C16A/C6A/MA/C14DA (68/27/5/1)	Int, no Ext	15	68
42	IV	C16A/C6A/AA/C14DA (68/27/3/1)	Int, 0.5% Zn Ext	27	93
43	III	C16A/C6A/AA (68/27/7.5)	No Int., 0.5% Zn Ext	36	97
44	II	C16A/C6A/AA/C4DA (68/27/5/1)	Int, No Ext	20	96
45	I	C16A/C6A/MA/68/27/7.5	No Int, No Ext	36	48
46	III	C16A/C6A/MA/68/27/7.5	No Int, 0.5% Zn Ext	36	40

As illustrated in the Table 2 the presence of an internal crosslinker (types II and IV) decreased the amount of water uptake at low temperatures (10°C) and increased the water uptake at higher temperatures (25°C) because the seed coating fell apart more easily once the seeds started expanding. The presence of an external crosslinker improved the mechanical stability of the seed coating. Thus a combination of external and internal crosslinkers can be employed to select the water permeabilities of water coatings at various temperatures.

Example 47

A wet grind consisting of Colloid 211 (0.4 g), ammonia (0.2 g, 50/50 v/v), water (190 g) and CaCO₃ (330 g) was blended in a Cowels mixer at 3000 rpm for 30 min. The wet grind (172 g) was mixed with the polymer latex of Example 7 (C16A/C6A/MA/C6DA, 70/25/5/0.5) (705 g) (T_m of 20 to 21°C) in a VIRTIS mixer. Zinplex 15 (5.4 g diluted with 20 g water) was added slowly

into the formulation followed by Lodyne S-106A (2.5 g diluted with 20 g water). Seed colorant (8 g), and water (540 g) were added to complete the formulation. The coating solution was filtered through a 60 micron wire mesh filter. Hybrid Corn (4 kg) was loaded into the seed coater, and the coating was carried out at a flow rate of 60 mL/min for a period of 11 min. The internal temperature of the pan was kept at ° 40°C.

Example 48

A wet grind was prepared by mixing in a Cowels mixer Colloid 211 (2 g), ammonium hydroxide (40 g of 10 % aq. solution), the polymer latex C16A/C6A/MA/C6DA (70/25/5/0.5) (250 g) (T_m of 20 to 21°C), and CaCO_3 (360 g) for 30 min at 3000 rpm. The concentrate was prepared from the wet grind by mixing the wet grind with the polymer latex (2150 g), and 20 g of 10% aq. ammonia. The coating solution was prepared by combining under light shear the concentrate (550 g), water (850 g), Zinplex 15 (3.6 g with 20 g water), and the seed colorant (10 g). Three kg of seeds were coated at a flow rate of 40 mL/min for 30 min. The pan temperature was maintained at 30°C.

Example 49

The formulation of Example 48 was used for coating wheat. The coating was carried out at 40 mL/min for a period of 20 min, with a pan temperature of 35°C.

Example 50

The polymer latex of Example 15(C14A/C6A/MA/C6DA (80/15/5/0.7)) with a lower T_m (12°C) was used in the coating of sugarbeets. All other components of the formulation were identical to those described for Example 46. Sugarbeets (4 kg) were coated at a spray rate of 30 mL/min, and a pan temperature of 30°C were coated for 40 min.

Example 51

A wet grind was prepared by blending Colloid 211 (2 g), ammonia (40 g, 10% aq. solution), latex (250 g) (C16A/C6A/AA/C14DA (70/25/8/1)),

and CaCO_3 (360 g). A concentrate was prepared by mixing the wet grind with the polymer latex (2150 g) in a VIRTIS mixer, followed by 18.4 g. The cottonseeds (4 kg) were coated at a flow rate of 30 mL/min for 45 min with the pan temperature not exceeding 30°C.

5 Coatings on other seed varieties, including lentils, chickpeas and sweet corn, were prepared using similar formulations as described above.

Example 52

10 Two hybrid corn varieties from Sucroscos Seeds (Manilla, Iowa) were field tested. They were planted in Casey, Iowa. Prior to planting some of the seeds were left uncoated, other were coated with (C16A/C6A/MA/C6DA (70/25/5/0.5), 1% Zinplex) (Example 52A) or (C16A/C6A/MA/C6DA (70/25/5/0.5), 0.5% Zinplex) (Example 52B). Seed were planted at different
15 times (23 March, 3 April and 17 April, 1996) and stand counts were performed 3 weeks after planting. The results are shown in Table 3 and are the average of four different experiments.

TABLE 3

20	Planting Date	Hybrid Corn Variety	Uncoated (stand count)	Example 52A Coating (stand count)	Example 52B Coating (stand count)
	23 March	A	1.8	19	51
	23 March	B	23	44	69
	3 April	A	74	91	102
25	3 April	B	110	111	114
	17 April	A	106	115	104
	17 April	B	110	119	121

30 As can be seen from Table 3, coating the seeds with the polymer latex coatings protect the seeds when the seeds are planted early in the planting season when there is a possibility for the seeds to suffer chilling injury. When seeds are planted later in the planting season, i.e., when it is unlikely for the soil temperature to go below 0°C, the seed coating does not have an adverse effect
35 on corn germination because the seed coating is readily released if the temperature remains above the T_m of the seed coating polymer and the seed starts expanding.

CLAIMS

1. A substrate having a solid polymeric coating thereon, the coating having been obtained by

5 (1) applying to the substrate an aqueous dispersion of solid particles comprising a crystalline polymer, the polymer (a) having a melting point T_m and (b) comprising units derived from a hydrophobic monomer, and

(2) evaporating water from the dispersion to form the solid polymeric coating;

10 the coating having at least one of the following characteristics:

(A) at temperatures below T_m , the coating is substantially impermeable to water (as hereinbefore defined), and at temperatures above T_m , the coating is substantially permeable to water (as hereinbefore defined);

15 (B) the polymer is a crosslinked polymer having a gel content of at least 50%,

(C) the polymer is derived from a monomer component comprising:

20 (i) a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and

(ii) a hydrophilic monomer component comprising a hydrophilic monomer, the ratio by weight of the hydrophobic monomer component to the hydrophilic monomer component being 10:1 to 50:1;

25 (D) the polymer is derived from a monomer component comprising a hydrophobic monomer component comprising (i) a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c , and (ii) a second hydrophobic monomer which

30 (a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is less than T_c , and

(b) is present in amount such that T_m is $(T_c - 5)^\circ\text{C}$ or less;

35 (E) the polymer is derived from a monomer component comprising a hydrophobic monomer component comprising (i) a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer

thereof is crystalline and has a melting point T_c , and (ii) a second hydrophobic monomer which

(a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is more than T_c , and

(b) is present in amount such that the coating has a tack at $(T_c + 10)^\circ\text{C}$ which is less than the tack at $(T_c + 10)^\circ\text{C}$ of a coating formed under the same conditions from a composition which is identical except that the crystalline polymer does not contain units derived from the second hydrophobic monomer;

(F) the polymer is derived from a monomer component comprising:

(i) a hydrophobic monomer component comprising a hydrophobic monomer, the hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c ;

(ii) a hydrophilic monomer component comprising a hydrophilic monomer; and

(iii) a crosslinking monomer having at least two polymerizable groups;

(G) the polymer is derived from a monomer component comprising one or more monomers containing carboxyl groups, at least 75% of the carboxyl groups having been neutralized;

(H) the polymer is crosslinked by an external crosslinker (as hereinbefore defined);

(I) the particles of the dispersion have coalesced to form a continuous coating, but retain a particulate character;

(J) the coating contains less than 1% of unreacted monomer, based on the weight of the polymer; and

(K) at least some of the particles comprise a core comprising said crystalline polymer and a coating around the core comprising a substantially amorphous polymer.

2. A substrate according to claim 1 wherein the crystalline polymer is a side chain crystalline (SCC) polymer having an onset-of-melting temperature, T_m , which is more than $(T_m - 10)^\circ\text{C}$.

3. A method of treating a seed or other organism to extend its dormancy, the method comprising:

(a) applying to the organism a non-phytotoxic coating composition which comprises:

5 (i) water, and
(ii) suspended in the water, particles which comprise a crystalline polymer having a melting point T_m of 0° to 40°C ; and
(b) causing water to evaporate from the composition after the composition has been applied to the organism, thereby forming a coating which
10 has a particulate character and

(i) at temperatures below T_m is substantially impermeable to water (as hereinafter defined), and
(ii) at temperatures above T_m is substantially permeable to water (as hereinafter defined).

15 4. A method according to claim 3 wherein the crystalline polymer is a crosslinked polymer which

(a) has a gel content of at least 50%;
(b) contains less than 1% of unreacted monomer; and
20 (c) is derived from a monomer component comprising:
(i) a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has a melting point T_c ;
(ii) a hydrophilic monomer component comprising a
25 hydrophilic monomer; and
(iii) a crosslinking monomer having at least two polymerizable groups.

30 5. A method according to claim 3 or 4 wherein the crystalline polymer is a side chain crystalline (SCC) polymer having an onset-of-melting temperature, T_o , which is more than $(T_m - 10)^\circ\text{C}$.

6. A composition which comprises:

(a) water,

(b) suspended in the water, particles comprising a crosslinked crystalline polymer which

- (i) has a gel content of at least 50%,
- (ii) contains less than 1% of unreacted monomer, and
- (iii) is derived from a monomer component comprising:

1) a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline and has melting point T_c , and

2) a hydrophilic monomer component comprising a hydrophilic monomer, and

3) a crosslinking monomer having at least two polymerizable groups; and

(c) a surfactant.

7. A composition according to claim 6 wherein the hydrophobic monomer component comprises, in addition to the first hydrophobic monomer, a second hydrophobic monomer which

- (a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is less than T_c , and
- (b) is present in amount such that T_m is $(T_c - 5)^\circ\text{C}$ or less.

8. A composition according to claim 6 wherein the hydrophobic monomer component comprises, in addition to the first hydrophobic monomer, a second hydrophobic monomer which

- (a) is such that a homopolymer thereof is amorphous and has a glass transition point T_g which is more than T_c , and
- (b) is present in amount such that a coating formed from the composition has a tack at $(T_c + 10)^\circ\text{C}$ which is less than the tack at $(T_c + 10)^\circ\text{C}$ of a coating formed under the same conditions from a composition which is identical except that the crystalline polymer does not contain units derived from the second hydrophobic monomer.

9. A composition according to claim 7 or 8 wherein the average particle size is less than 0.5 micron.

10. A method of making a composition as claimed in any one of claims 6 to 9, the method comprising:

(a) providing an aqueous reaction medium comprising:

(i) water,

(ii) the monomer component, the monomer component containing at least 2% by weight, based on the weight of the monomer component, of the hydrophilic monomer component,

(iii) the surfactant, and

(iv) at least 1% by weight, based on the weight of the water, of a cosolvent which increases the solubility of the hydrophobic monomer component in the water;

(b) polymerizing the monomer component in the aqueous reaction medium so that at least 99% by weight of the monomer component polymerizes to form the crystalline polymer in the form of particles having an average particle size less than 0.5 micron, the monomer component being present in amount such that at the end of the polymerization, the solid polymer content of the reaction mixture is at least 30%; and

(i) the surfactant being present in amount such that the monomer component is initially present in the aqueous reaction medium in the form of droplets having a diameter greater than 10 microns, and/or

(ii) the surfactant and the cosolvent being present in amount such that the hydrophilic monomer component is substantially randomly polymerized in the crystalline copolymer.

11. A method for preparing an aqueous suspension, the method comprising the steps of:

(a) providing an aqueous reaction medium comprising:

(i) water,

(ii) a first monomer component comprising a hydrophobic monomer component comprising a first hydrophobic monomer, the first hydrophobic monomer being such that a homopolymer thereof is crystalline, and

(iii) a surfactant;

b) polymerizing the first monomer component to form a crystalline polymer in the form of particles suspended in the reaction medium; and

c) polymerizing a second monomer component to form a shell on said particles,

the amounts of said first and second monomer components being such that the product of step (c) has a solids content of at least 30%, and

the amount of surfactant being such that the product of step (c) contains particles having an average particle size of less than 0.5 microns and a residual monomer content of less than 1%, based on the weight of the first and second monomer components.

12. A composition suitable for use in setting a flexible fibrous material, the composition comprising:

(a) water;

(b) particles suspended in the water, the particles comprising a crystalline polymer; and

c) an effective amount of an additive having a desired effect on the fibrous material.

13. A composition according to claim 21, wherein the crystalline polymer has a T_m of 40 to 60°C, the fibrous material is human hair, and the additive is a hair care additive.

14. A composition according to claim 21 wherein the fibrous material is a fabric and the additive is a fabric-treating compound.

15. A method for rendering a flexible fibrous material repeatedly settable, the method comprising:

(1) applying to the fibrous material a composition as claimed in any one of claims 12 to 14; and

(2) evaporating the water from the composition while the composition is in contact with the fibrous material, thereby forming a coating on the fibrous material.

EXAMPLE 1.

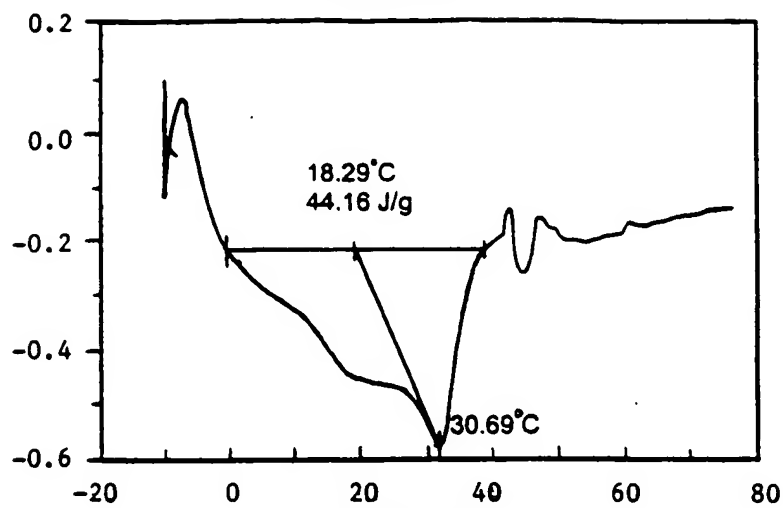


FIG. 1

EXAMPLE 4.

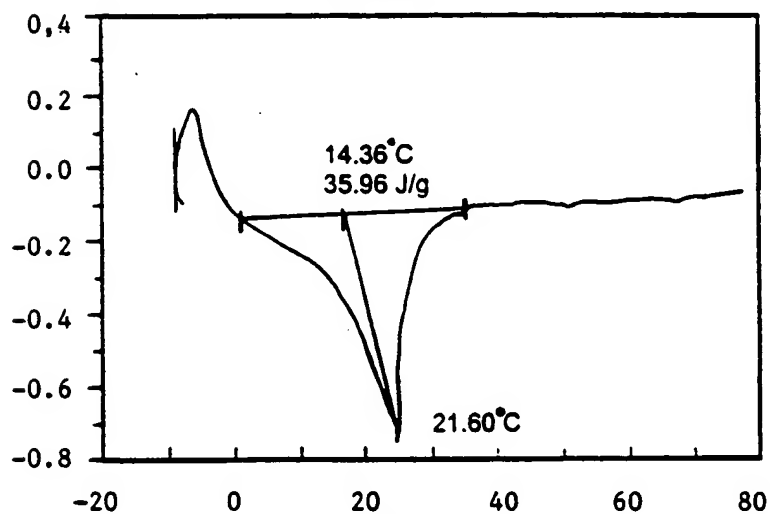


FIG. 2

EXAMPLE 7.

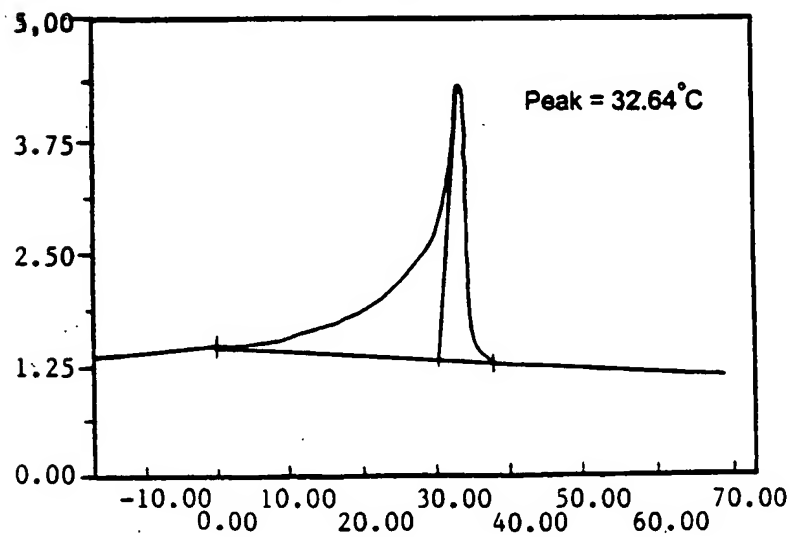


FIG. 3

EXAMPLE 9

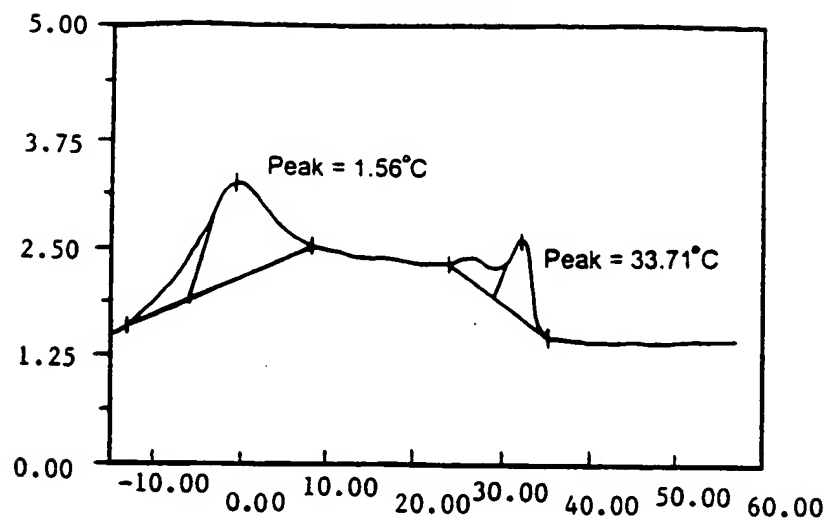


FIG. 4

EXAMPLE 11.

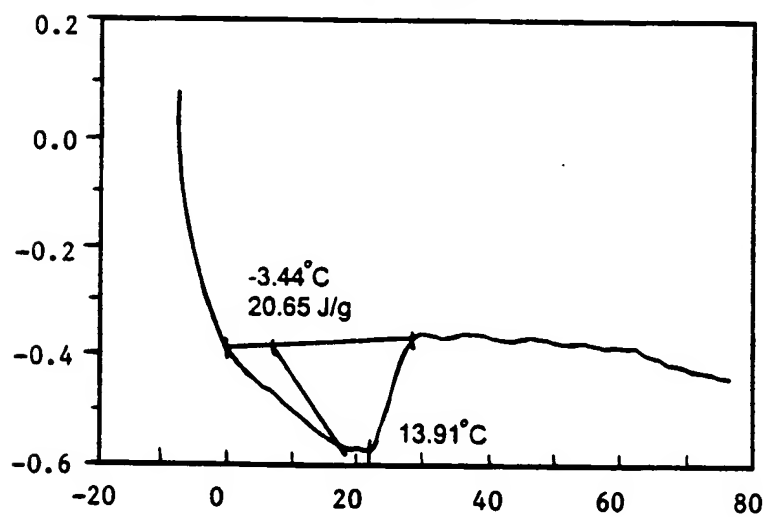


FIG. 5

EXAMPLE 12

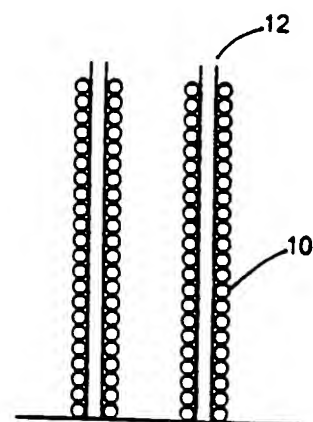
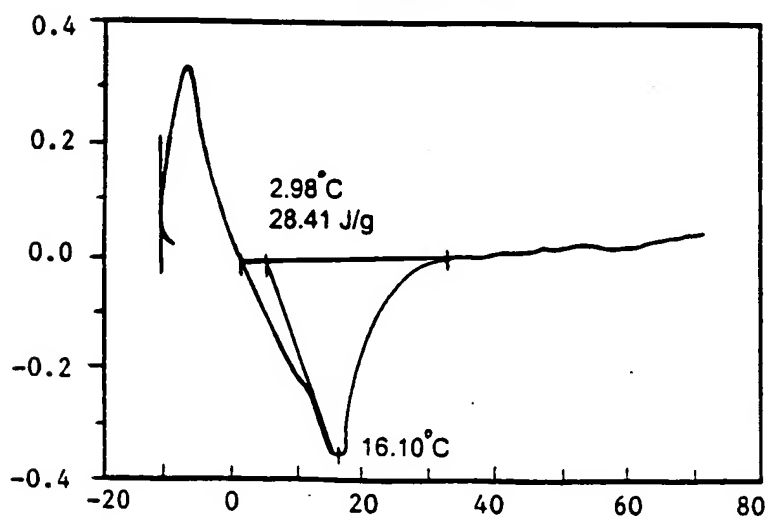


FIG. 7




FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/22772

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B05D7/00 A01C1/06 A61K7/06 D06M15/00 D06M23/00
C08F2/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B05D A01C A61K D06M C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 184 020 A (COUPEK JIRI ET AL) 15 January 1980 see the whole document ---	10
X	CHEMICAL ABSTRACTS, vol. 103, no. 24, 16 December 1985 Columbus, Ohio, US; abstract no. 196567c, HITACHI CHEMICAL CO LTD. : "Granular polymers" page 11; XP002063723 see abstract	10
X	& PATENT ABSTRACTS OF JAPAN vol. 9, no. 271 (C-311), 29 October 1985 & JP 60 120702 A (HITACHI KASEI KOGYO KK), 28 June 1985, see abstract --- -/--	10



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance.

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

28 April 1998

Date of mailing of the international search report

18/05/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brothier, J-A

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEMICAL ABSTRACTS, vol. 112, no. 20, 14 May 1990 Columbus, Ohio, US; abstract no. 180099b, TAYAMA S. ET AL: "Method for suspension polymerization" XP000063301 see abstract	10
X	& PATENT ABSTRACTS OF JAPAN vol. 14, no. 24 (C-677), 18 January 1990 & JP 01 266104 A (MITSUBISHI RAYON CO. LTD.), 24 October 1989, see abstract	10
X	--- CHEMICAL ABSTRACTS, vol. 119, no. 24, 13 December 1993 Columbus, Ohio, US; abstract no. 250751d, IMAMURA TAKESHI ET AL.: "Preparation of polymer particles with narrow particle size by suspension polymerization" page 19; XP000407439 see abstract	10
X	& PATENT ABSTRACTS OF JAPAN vol. 17, no. 499 (C-1109), 9 September 1993 & JP 05 132504 A (NIPPON PAINT CO LTD.), 28 May 1993, see abstract	10
A	--- WO 96 27641 A (LANDEC CORP) 12 September 1996 see the whole document	1
A	--- WO 92 10081 A (LANDEC LAB INC) 25 June 1992 see the whole document	3
A	--- WO 93 21967 A (LANDEC CORP) 11 November 1993 see page 9, line 2; examples	3
A	--- US 4 104 824 A (LUNDBERG ROBERT D ET AL) 8 August 1978 see the whole document -----	3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/22772

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4184020 A	15-01-80	CS 150819 B AT 325852 B AU 461977 B AU 3603071 A CA 936997 A CH 562261 A DE 2157627 A FR 2115979 A GB 1370477 A NL 7116106 A,C SE 405605 B US 4238509 A	17-09-73 10-11-75 26-05-75 31-05-73 13-11-73 30-05-75 19-10-72 07-07-72 16-10-74 26-05-72 18-12-78 09-12-80
WO 9627641 A	12-09-96	AU 5183496 A CA 2214893 A	23-09-96 12-09-96
WO 9210081 A	25-06-92	US 5129180 A CA 2097907 A EP 0560943 A	14-07-92 07-06-92 22-09-93
WO 9321967 A	11-11-93	CA 2134219 A EP 0639086 A	11-11-93 22-02-95
US 4104824 A	08-08-78	US 4130517 A	19-12-78